


Doodle Scrub[®] Wiring Harness Replacement

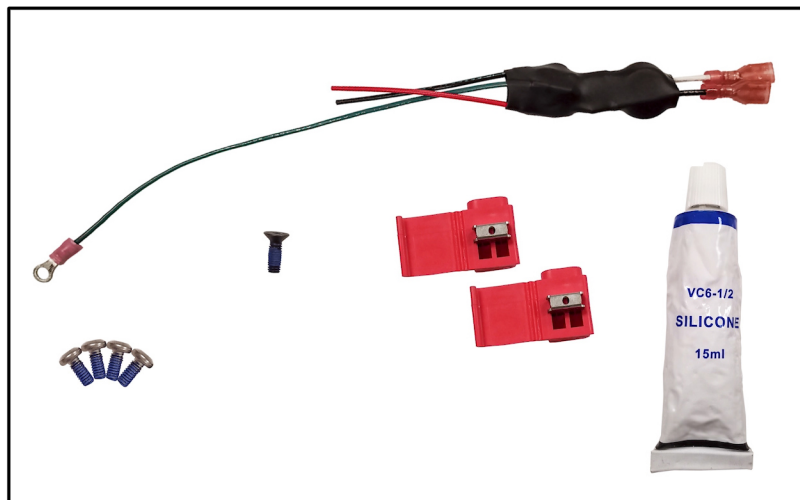

Doodle Scrub[®] Wiring Harness Replacement Kit

- 4 cover screws
- 1 motor ground screw
- 2 wire connectors
- Wiring harness
- 100% silicone.

DO NOT REUSE OLD PARTS!

What You Will Need

- ☐ Doodle Scrub[®] Wiring Harness Replacement Kit
- ☐ Pliers
- ☐ Wire Cutters

- ☐ Torx 20
- ☐ 2.5mm Allen Wrench
- ☐ Impact Driver/Drill (optional)




Unplug the power cord and disconnect the handle.




Use a Torx 20 to remove the 4 base screws. Remove the carry strap.




800-557-6822
www.squarescrub.com

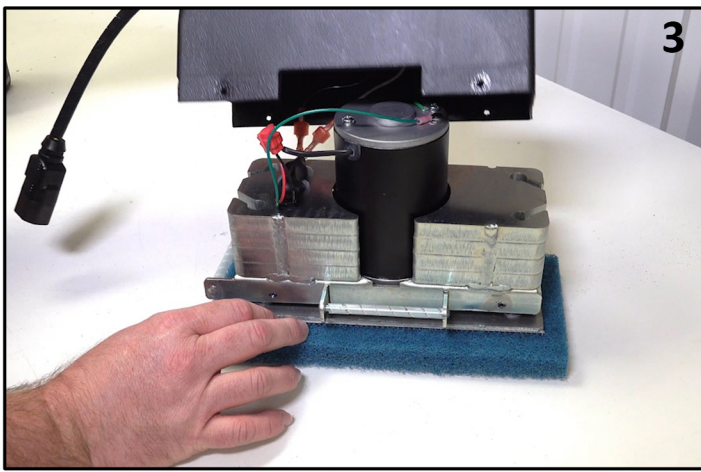


Lift the cover and set it beside the Doodle Scrub® base.

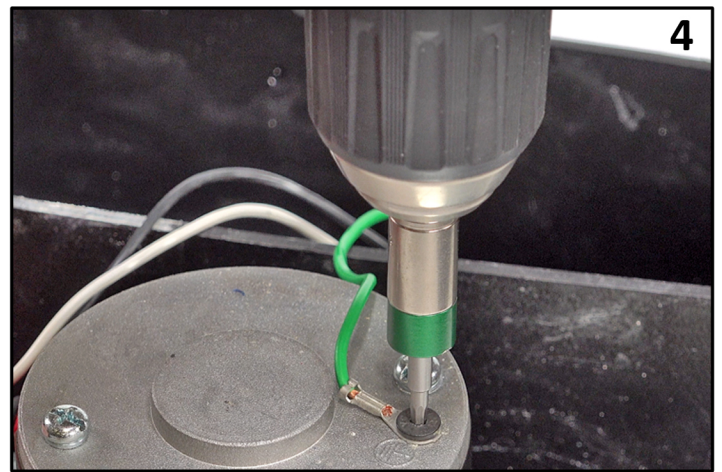

Use a 2.5 mm Allen wrench, or impact driver/drill, to remove the motor ground screw.

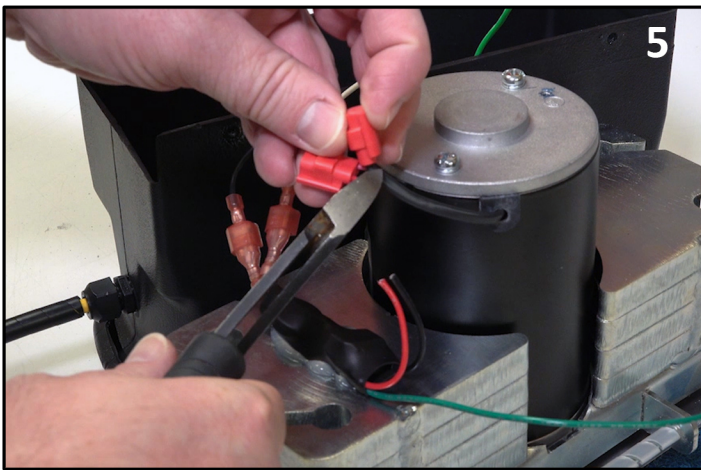


Cut both sets of black and red wires leading from the red wire connectors. Disconnect the black and white wires leading from the cover.

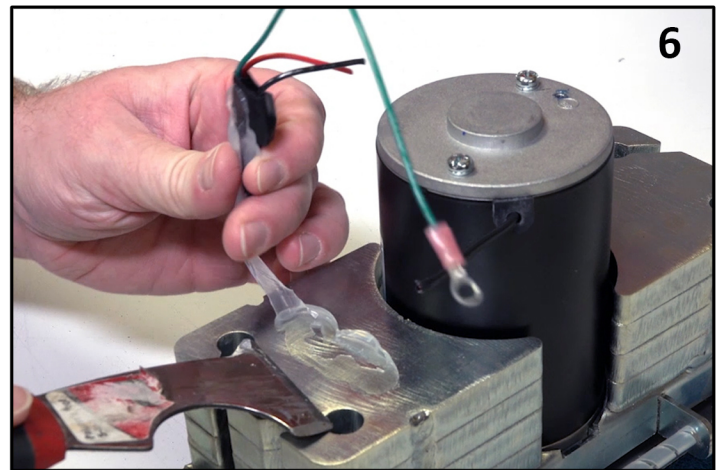

Remove the old wiring harness and any remaining silicon.




Apply a bead of silicon to the machine base.

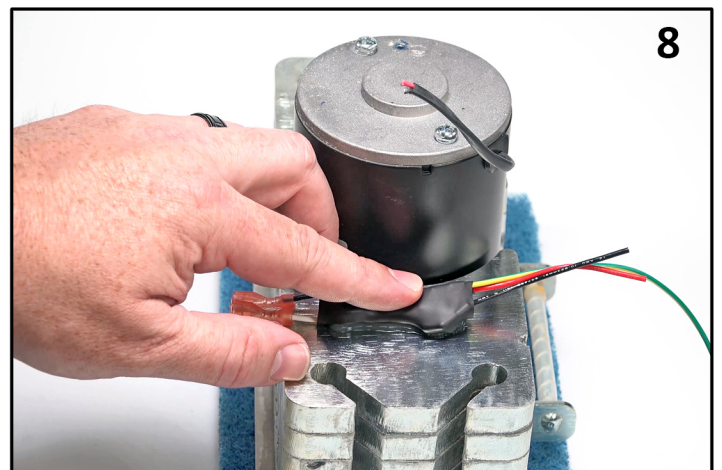


Set the new wiring harness in the silicon. Allow 2-4 hours for the silicon to completely dry.



800-557-6822
www.squarescrub.com

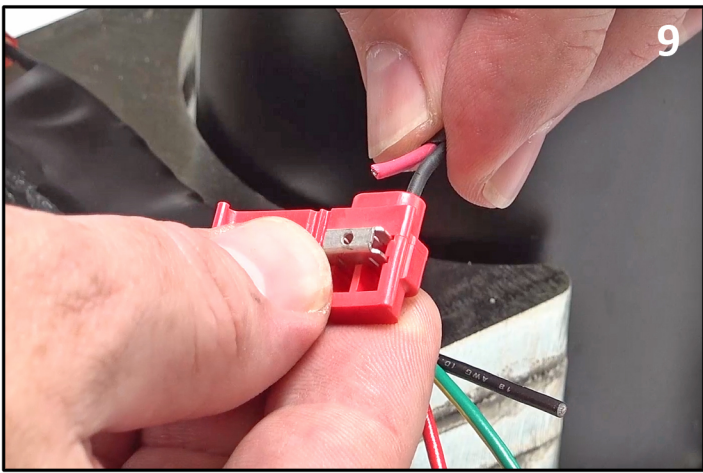


Insert the red wire from the motor and the red wire from the harness into the connector.

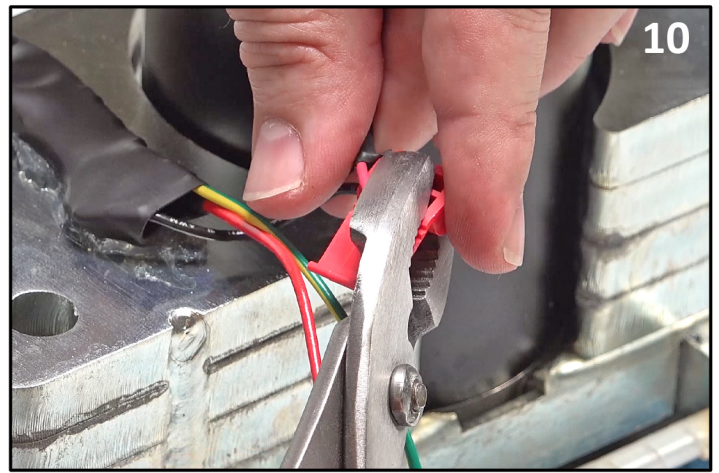

Clamp down using pliers. Repeat steps 9 and 10 with the black wire from the motor and the black wire from the harness.



Connect both green ground wires to the motor using the new motor ground screw.

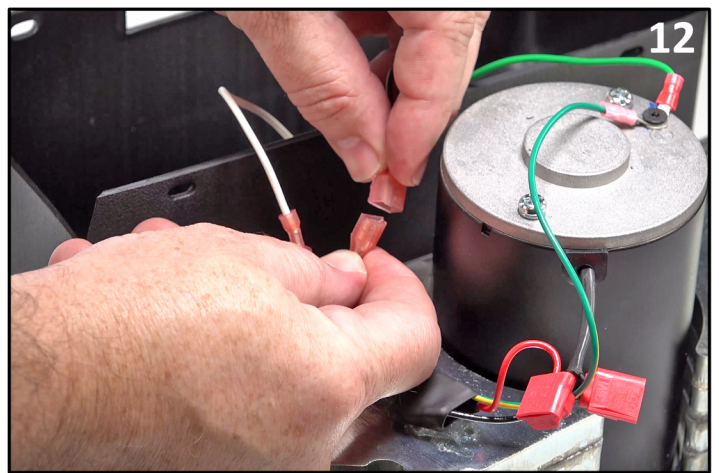

Connect the two white wires and the two black wires.



Lower the cover onto the Doodle Scrub® base. Align the carry strap, and install the 4 new cover screws.



Connect the handle and power supply, and test the Doodle Scrub® on a driver pad.



800-557-6822
www.squarescrub.com