

Doodle Scrub Annual Maintenance Kit - SS 051195

- Annually**
- Bearing assembly should be replaced as needed. Replace isolators when replacing the bearing.
 - Replace ALL isolators.
 - Use a vacuum to clean away debris build-up around base plate.
 - Check grip face for wear.
- Weekly Preventative Maintenance**
- Make certain a pad is placed on the grip face.
 - Wipe entire unit with a damp microfiber cloth.
 - Inspect grip face for wear. Remove debris between grip face and base plate.
 - Clean pad and base plate assembly. Remove or replace pad as needed.
- After use (daily)**
- Check grip face and driver pad. Inspect for wear/debris.
 - Check AC power cord. DO NOT operate equipment if AC power cord is cut, frayed, or if ground is missing.
- Prior to use (daily)**

Maintenance Schedule

Doodle SCRUB & **Doodle SCRUB+**

Quick Start Guide




SQUARE SCRUB



Register your new extractor at
www.squarescrub.com/warranty-registration
 to activate your warranty.

The **Doodle Skate** by Square Scrub is a specialized attachment designed to transform the Doodle Scrub EBG-9 floor machine into an efficient baseboard and stair riser cleaning tool by allowing the machine to operate at a 90° angle.

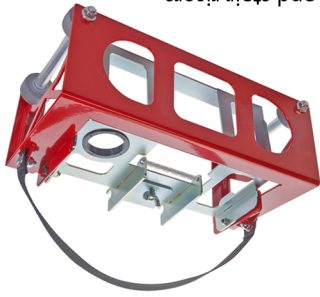

- **Full Pad Contact:** against baseboards and stair risers
- **Smooth Pivoting Action:** Adapts to wall contours
- **High-Speed Scrubbing:** When attached to the Doodle Scrub it operates at 4100 RPM
- **Durable Carrying Strap:** Comes with a sturdy nylon carrying strap for easy transportation and handling



Find the full manual for your Doodle Scrub at
<https://www.squarescrub.com/product-manuals-sds/>



SQUARE SCRUB

196 CR 702
 Jonesboro, AR 72405
 800-557-6822
squarescrub.com


The owners manual QR code can also be found on
 the handle of the Doodle Scrub.

1 QUICK START GUIDE
Doodle Scrub & Doodle Scrub+



Make certain a pad is between the grip face and the floor.

2

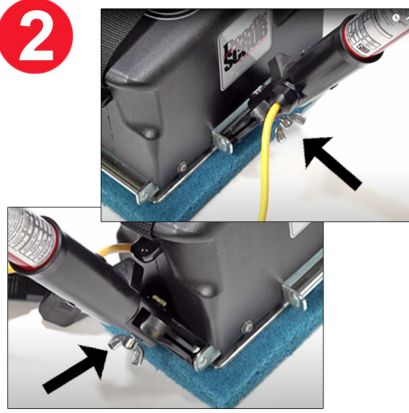


Press down firmly to attach the handle to either side. Loosen the wingnut if necessary.

3



After the handle is clipped on, tighten the wingnut.

4

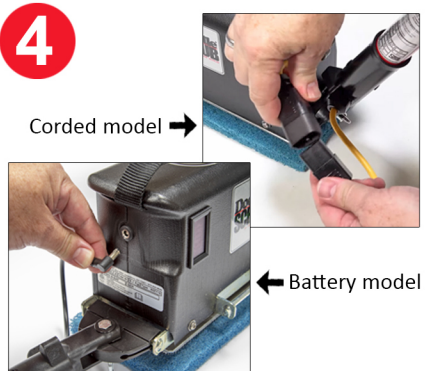

Corded model →
← Battery model

Plug the 2 yellow cords together at the base for corded models, plug the black cord into the base for battery powered models.

5



Squeeze the trigger to operate the Doodle Scrub.


6



To remove the handle, loosen the wingnut, hold the handle upright and turn the handle to the side to release it.



Shop Pads

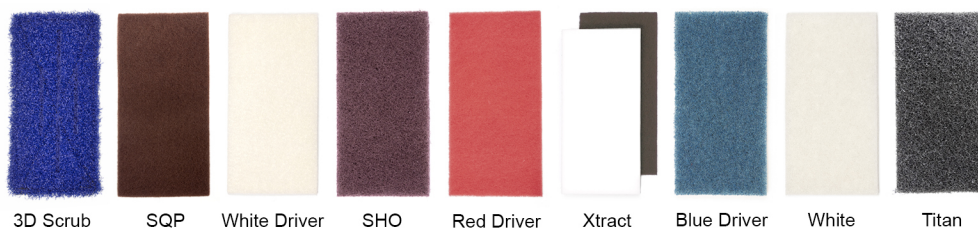


Wet Strip VCT




Clean Concrete



Clean Resilient



Clean LVT



Clean Tile & Grout



Dry Prep VCT